





保存日期:2023/1/6 17:20:01

编制日期:2023/01/06

2

1

REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/06

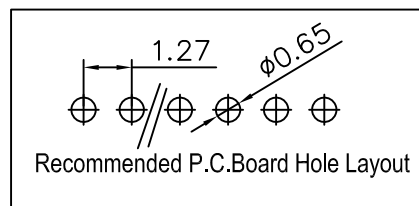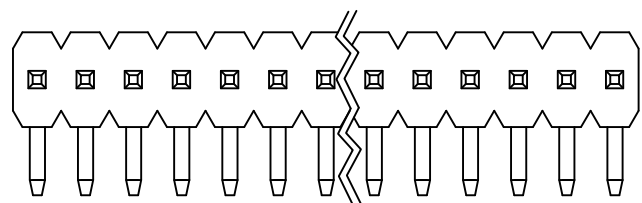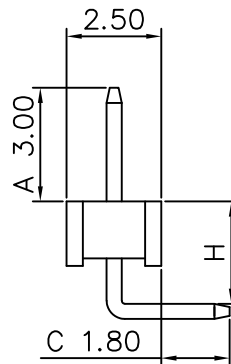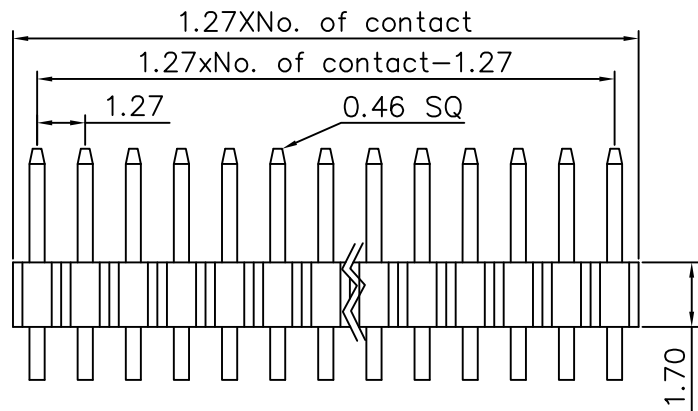

SPECIFICATIONS

Current Rating: 1.0Amps

Contact Resistance: 20Milliohms Max

Insulator Resistance: 1000 Megohms Min.

Dielectric Withstanding: 500VAC/minute

Operating Temperature: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$

Max Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

MATERIALS:

Contact Material: Brass

Contact Plating: Gold or Tin over 50u"Ni

Insulator Material: Glass Filled Polyester(UL94V-0)
Standard:PA6T

 Http://www.cisconn.com		深圳市新世联电子有限公司 TEL:+86 (755) 29912370 FAX:29912372			
Tolerance Unless Otherwise Specified	Title	PH1.27 排针 单排单塑 90度			
.X ~ ± 0.30		Units	Scale	REV NO.	Material No.
.XX ~ ± 0.25		mm	4:1	V0	xxxx-xxxx-xxx-xx
.XXX ~ ± 0.20		Drawing By	Date	Reviewed By	Date
Angle ~ $\pm 3^{\circ}$		设计人	2023/01/06		Approvai By Date