
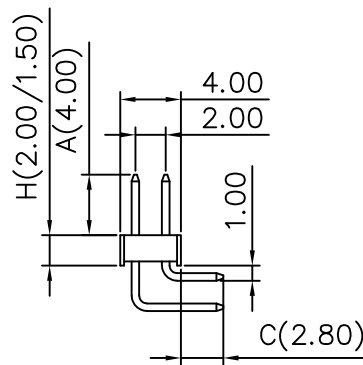



REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/01/06

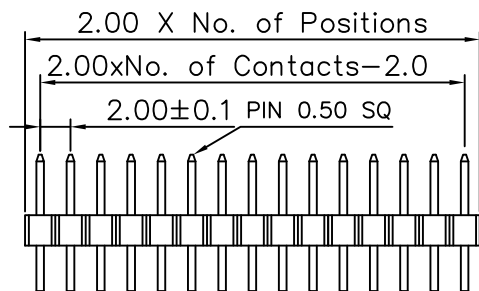

SPECIFICATIONS

Current Rating:2AMP

Contact Resistance:20mΩ Max

Insulation Resistance:1000MΩ Min

Withstand Voltage:500V AC/minute


Operation Temperature:-40℃ to +105℃

Contact Material: Brass

Contact Plating:Au or Sn over 50 μ "Ni

Insulator Material:Polyester(UL94V-0)

Standard:PA6T

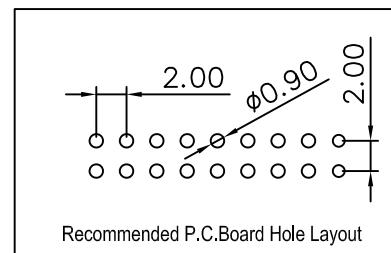

Recommended P.C.Board Hole Layout

cisconn Http://www.cisconn.com		深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372			
Tolerance Unless Otherwise Specified	Title	PH2.0排针 双排单塑 90度			
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	4:1	V0	xxxx-xxxx-xxx-xx
.XXX ~ ±0.20		Drawing By	Date	Reviewed By	Date
Angle ~ ± 3°		设计人	2023/01/06		