





REV NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/09

客户编码	XX-XXX
------	--------

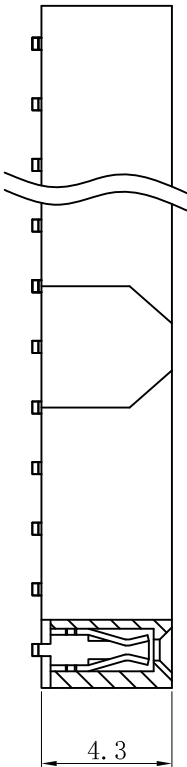

SPECIFICATIONS

Current Rating:1.5AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material:Phosphor Bronze
Contact Plating:Au
Insulator Material:Polyester(UL94V-0)
Standard:PBT

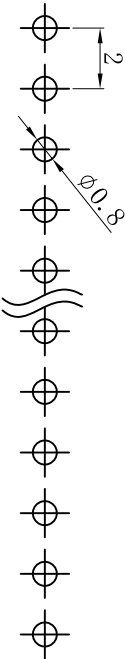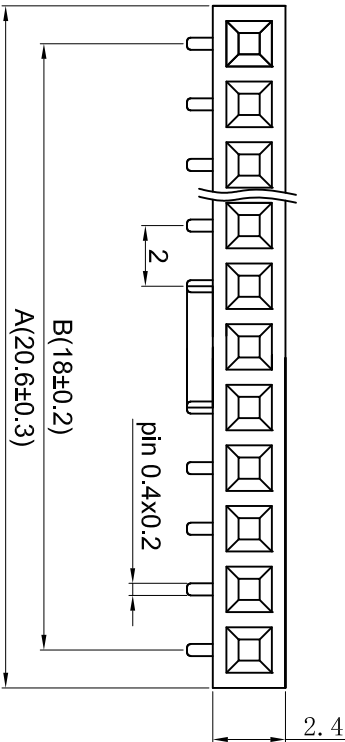

Recommended P.C.Board Layout

备注:

- 1、A= 2.00X No. of Positions + 0.6
- 2、B= 2.00 X No. of Contacts - 2.00
- 3、胶壳用常规标准胶壳, 1xNo. of Contacts
- 4、材质: PBT 颜色: 黑色
- 5、端子表层镀金0.8 μ "

Http://www.ciscomn.com		深圳市新世纪电子有限公司			
TEL: +86 (755) 29912370 FAX: 29912372					
Tolerance Unless Otherwise Specified		Title	排母2.0mm 单排 立贴 (塑高4.3) U型 带凸		
.X ~ ±0.30		Units	mm	Scale	REV NO.
.XX ~ ±0.25				4:1	V0
.XXX ~ ±0.20		Drawing By	Date	Reviewed By	Date
Angle ~ ± 3°		LiuYang	2023/05/09		
		Material No.		Approval By	
		XXXXX-XXXXX-XXX-XX		Date	